



## Internal door mount



#### Features


- ♦ IP55 waterproof at external side
- ◆ "One touch" dry run test and dust cleaning
- Standalone temperature control
- ♦ Clear LED status indicator
- ◆ Dry contact alarm output

### Design

- ◆ Air to air heat exchange
- ◆ Rated voltage at 48V
- ◆ Reduntant fan quantity design
- ♦ High efficiency and reliable fan
- ♦ Easy installation and maintenance

# HEX200PA series

#### **Dimension drawing**

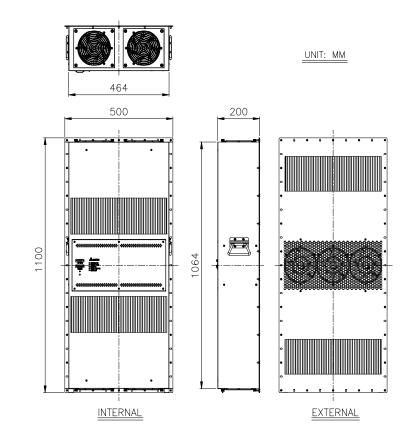

Main feature	Unit	Specification	
Dimension (H x W x D)	mm (inch)	1100 x 500 x 200 (43 x 20 x 8)	
Cooling capacity <sub>∗Note</sub>	W/K (W/°F)	110 (61)	200 (111)
Rated voltage	VDC	48	
Operating current	Α	2.6	6.6
Opearting power	w	125	317
Operating voltage range	VDC	40 ~ 60	
Operating temperature range	°C	-10 ~ +65	
Noise (1.5 meter)	dB-A	65.0	74.0
Weight	Kg (Lb)	26 (57)	

\* Note : The cooling capacity (W/K , W/°C or W/°F) is defined as Q/ (TI-TA)

Q: Heat dissipation (W) from inside of cabinet

TI : Return temperature of internal air circuit (K , °C or °F)

TA: Ambient temperature of external air circuit (K, °C or °F)

<sup>\*</sup> Specifications are subject to change without notice.